
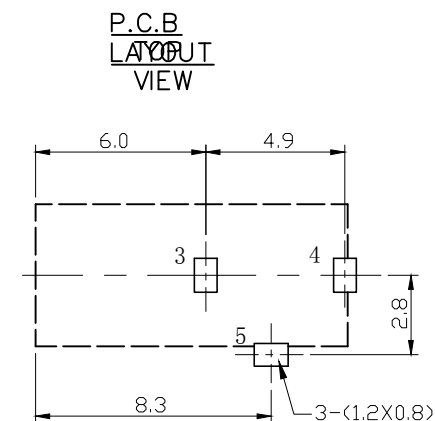
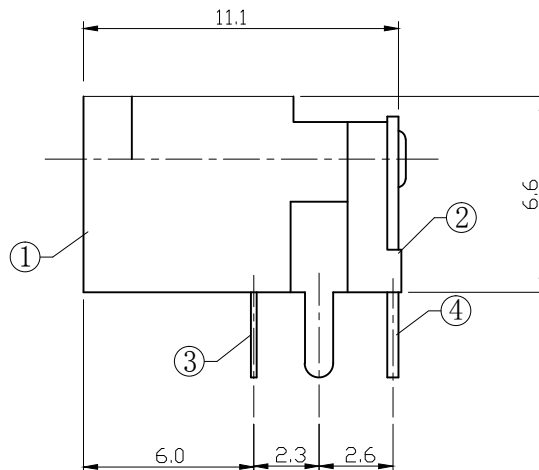


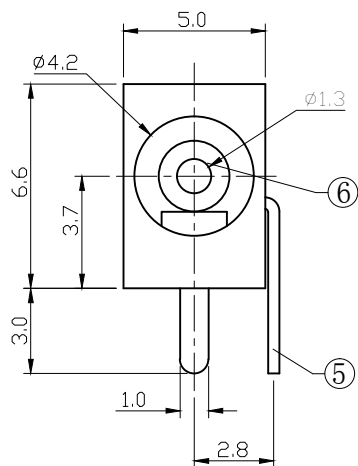

SCHEMATIC

DC-002	DC-002-1

SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-20N;
- 6.life test: 5,000 cycles.

6	PIN	1	H59 BRASS(ROHS)	Sn-Plating(ROHS)
5	CURVE PIECE	1	H62 BRASS(ROHS)	Ag-Plating(ROHS)
4	FLAT PIECE	1	H62 BRASS(ROHS)	Ag-Plating(ROHS)
3	SPRING PIECE	1	STAINLESS STEEL(ROHS)	Ag-Plating(ROHS)
2	COVER	1	PBT(ROHS)	
1	HOUSING	1	PBT(ROHS)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM		TYPE:		MODEL NO:
		DC JACK		DC-002
DESIGNER				PAPER NO:
BY CHECK				TOLERANCE
BY APPROVED				SCALE
				VER
				PAGE 1 OF 1
				1

东莞市竟锐电子有限公司